



**ECOSOFT RO<sub>bust</sub>1500/PRO with faucet**



Included fittings required for installation:

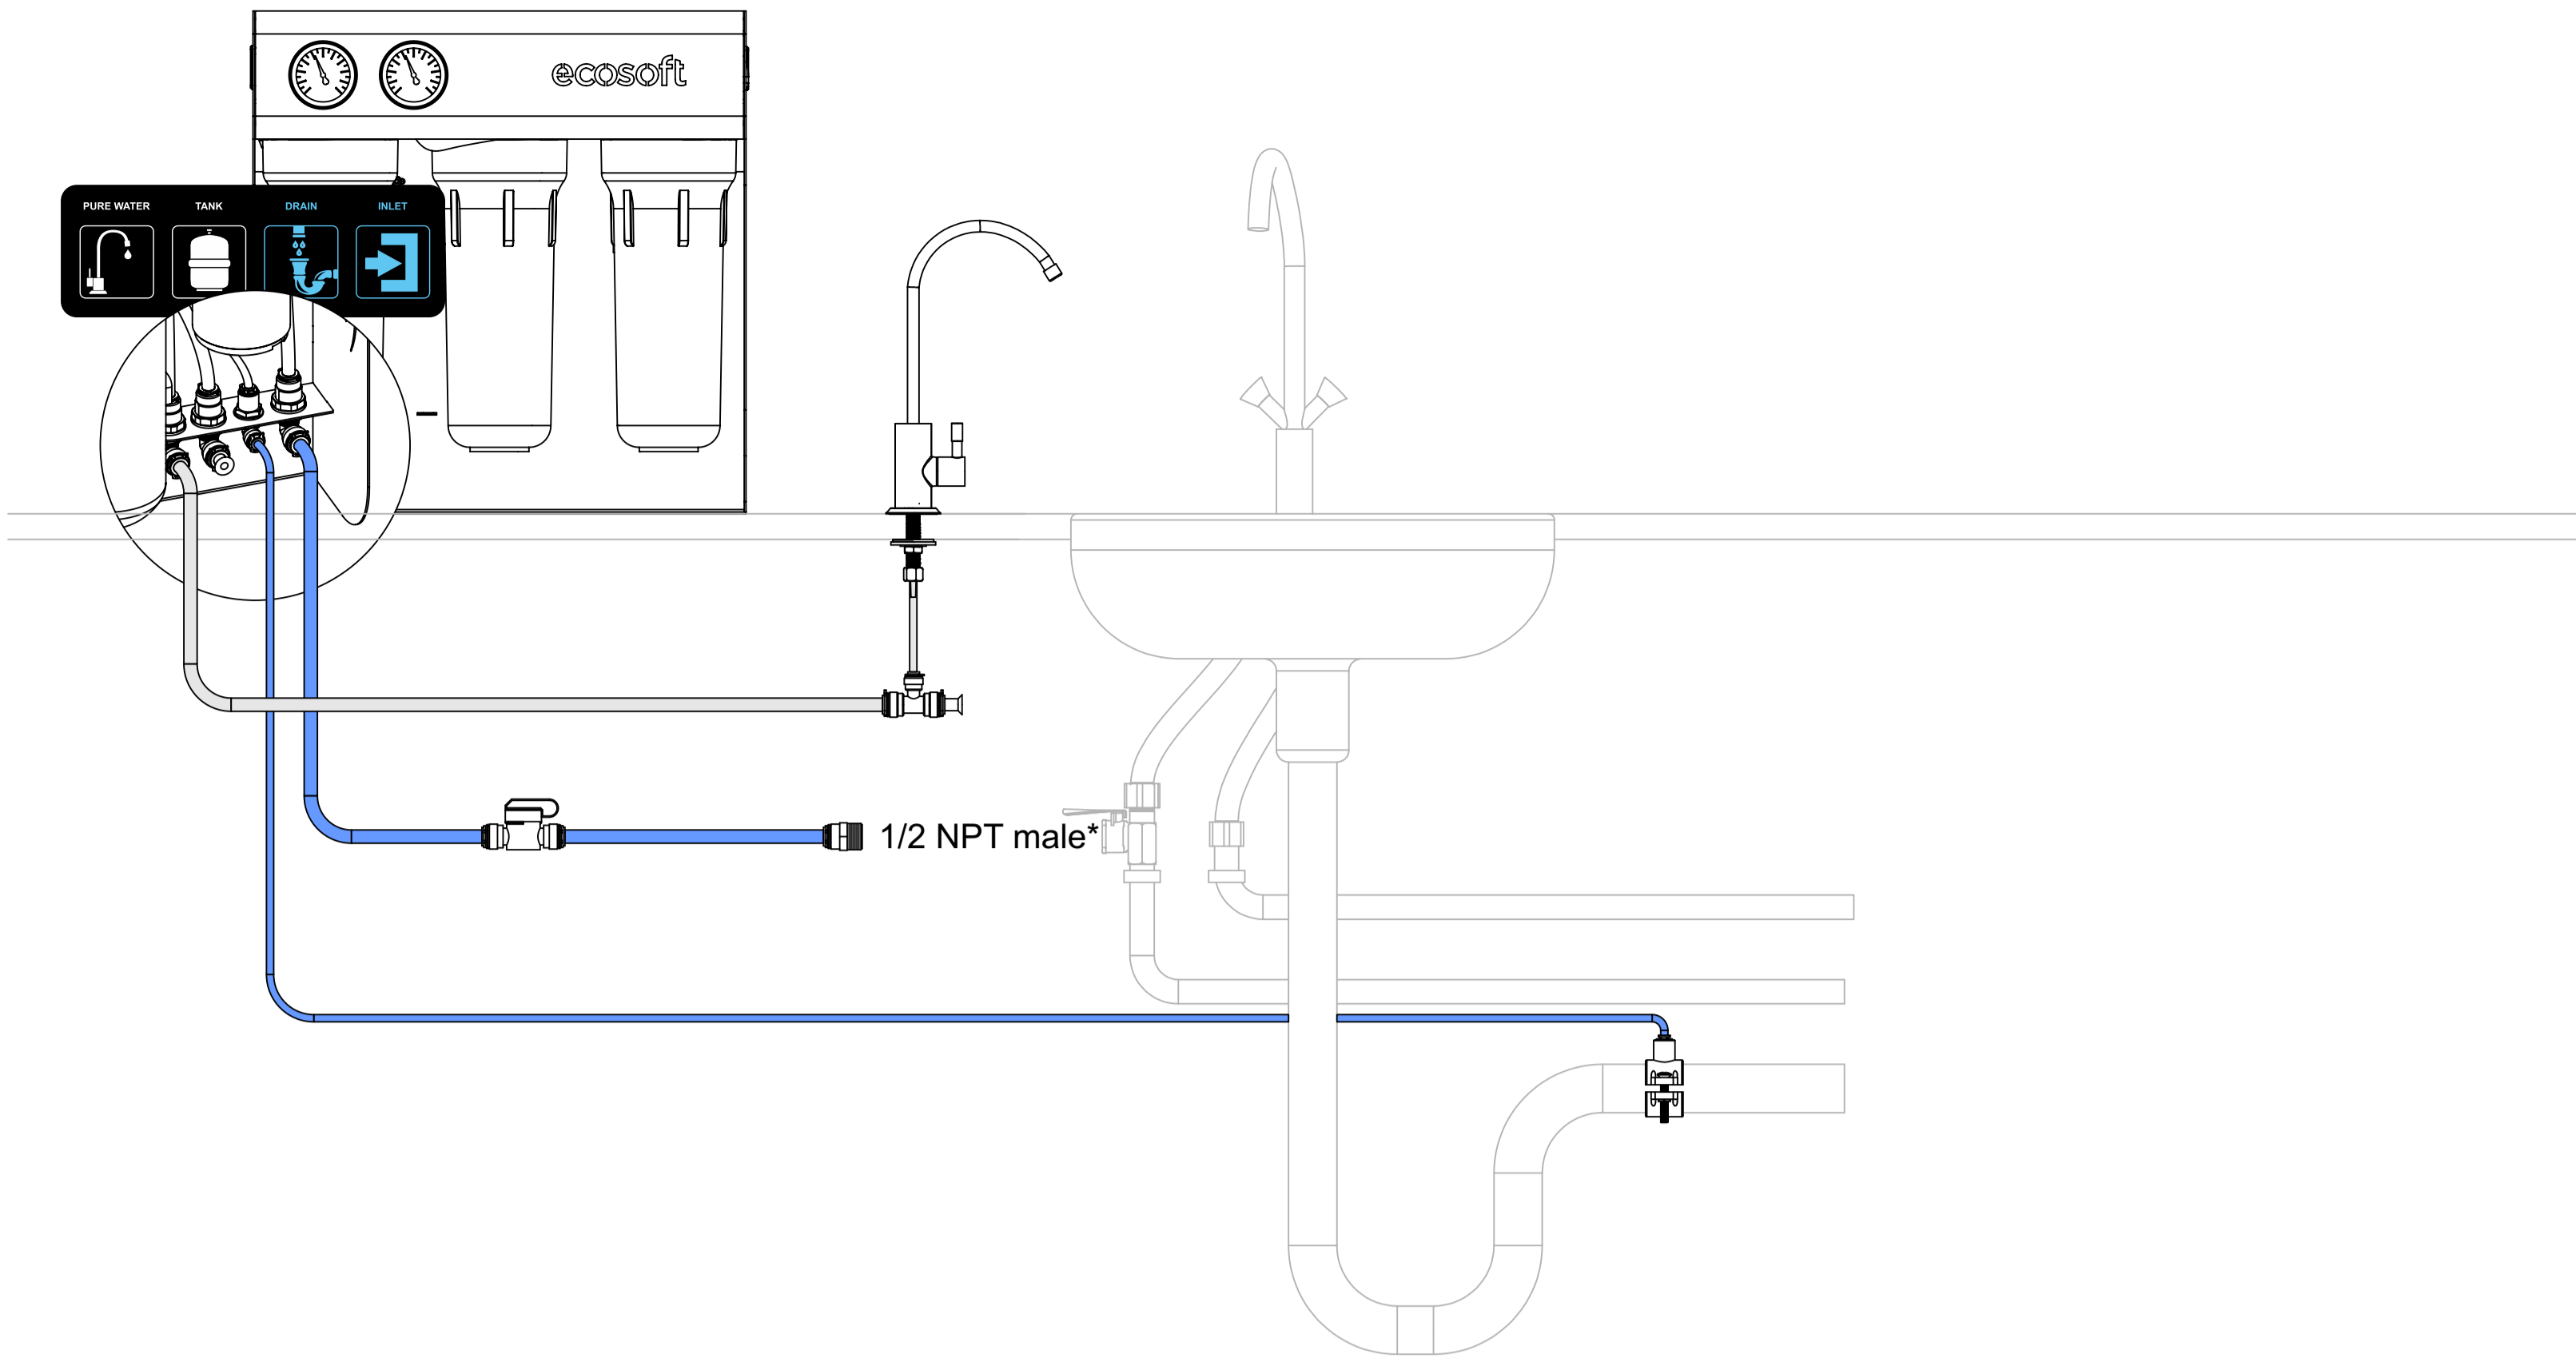


**ECOSOFT RO<sub>bust</sub>1500/PRO with pressure tank**

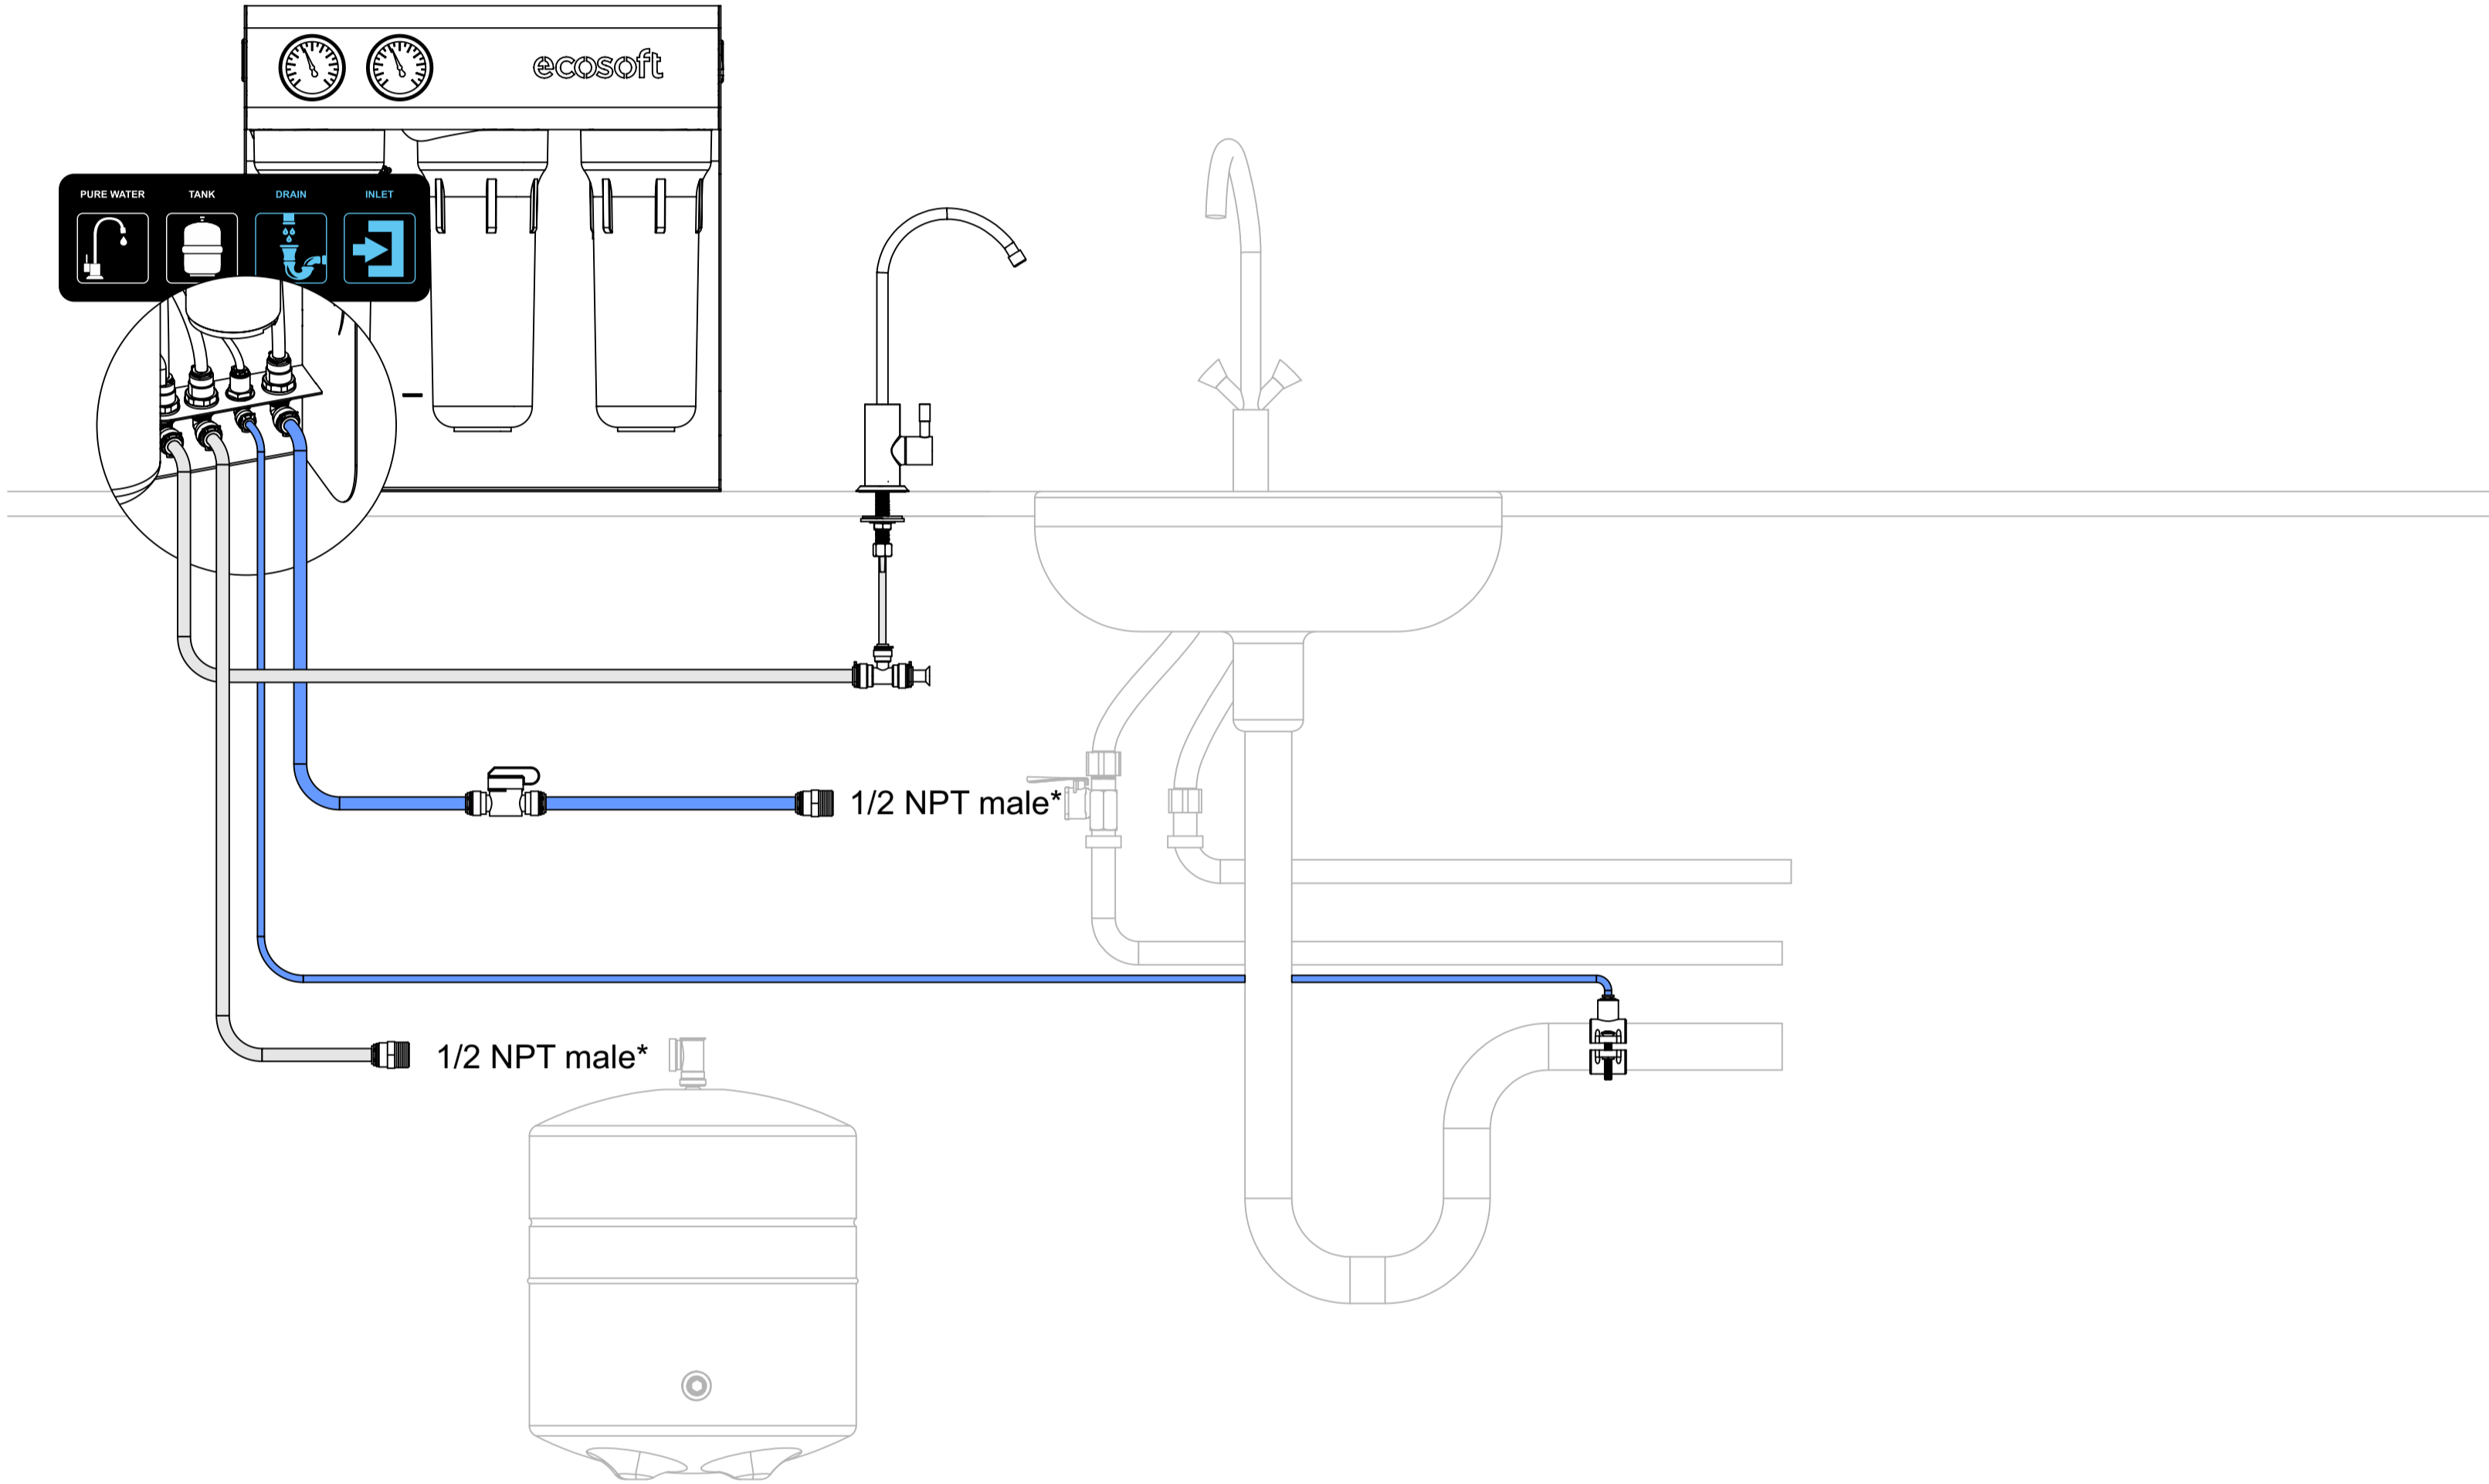


Included fittings required for installation:



**ECOSOFT RO<sub>bust</sub>1500/PRO with pressure tank and additional water consumer**

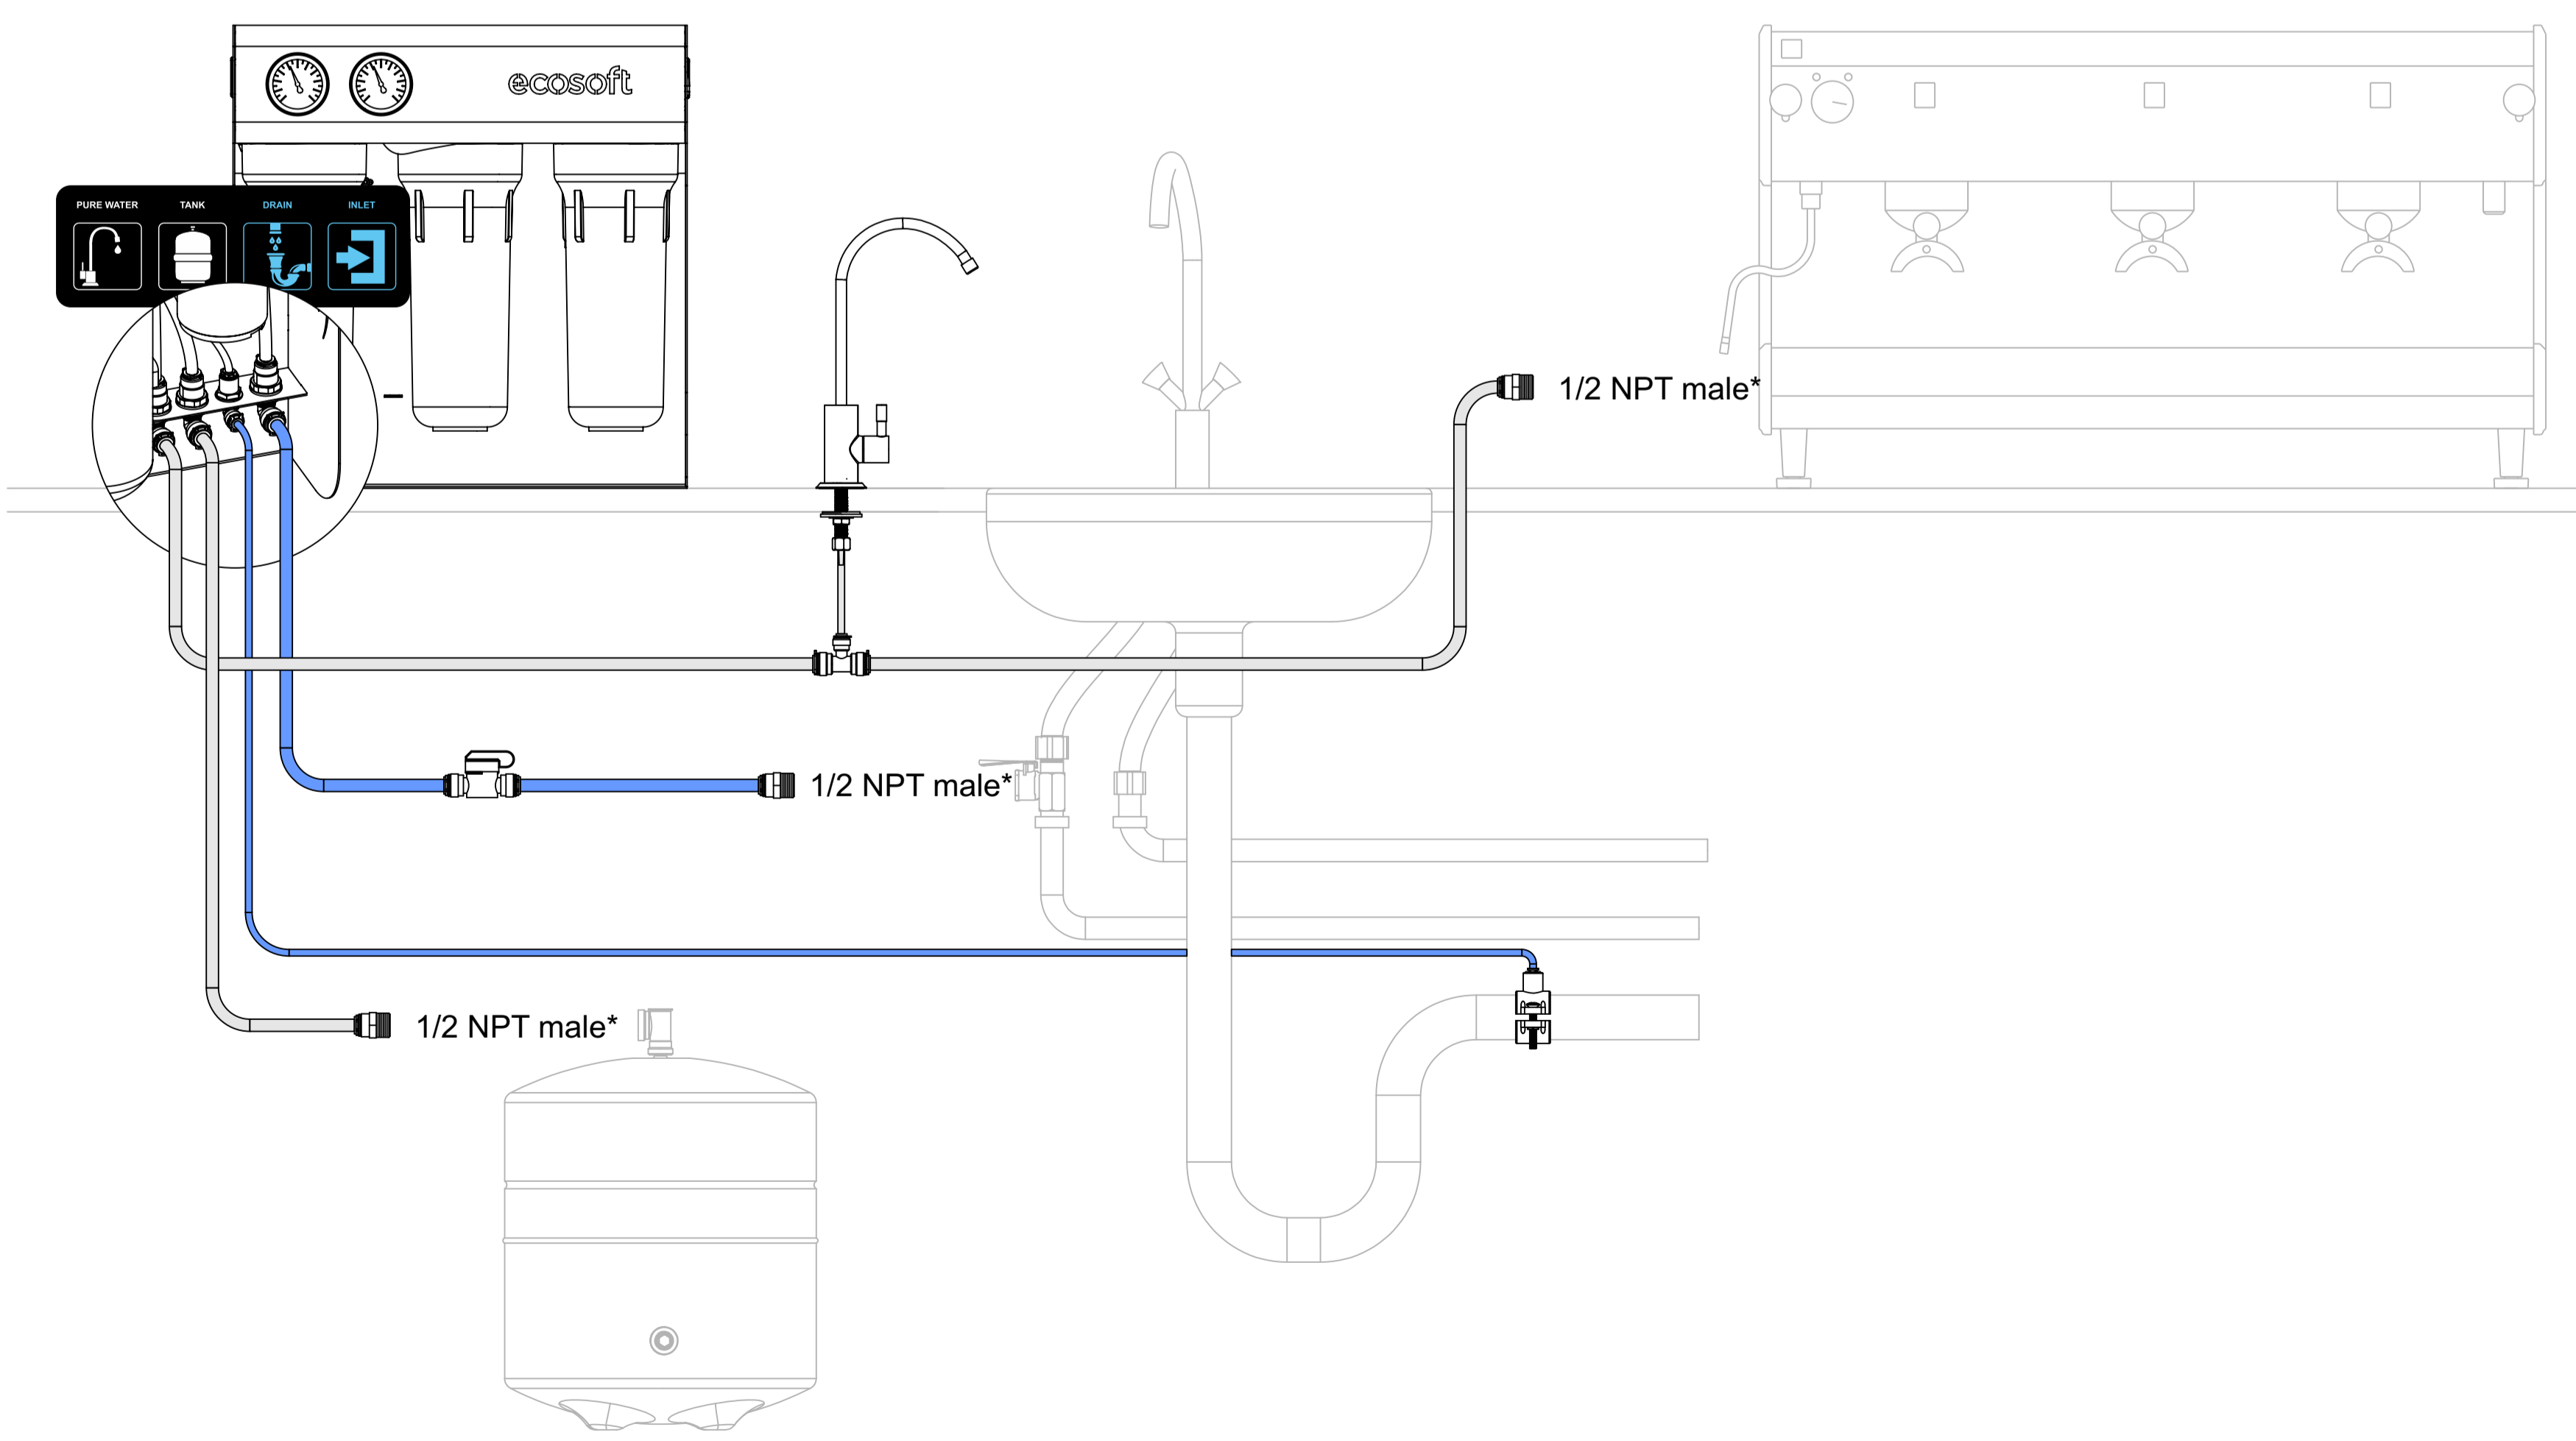

Included fittings required for installation:

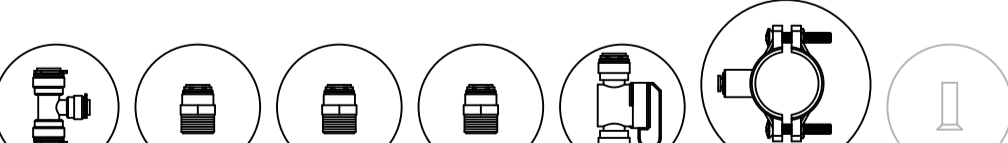

Feed adapter has 1/2 NPT male thread. Make sure that inlet pipe has 1/2 female thread for system connection.

After installing the system, lock fittings collars with locking clips.